



Industrial Microbiology

Enzymatic saccharification and fermentation of cellulosic date palm wastes to glucose and lactic acid



Sulaiman A. Alrumman

Department of Biology, College of Science, King Khalid University, P.O. Box 3100, Abha 61417, Saudi Arabia

ARTICLE INFO

Article history:

Received 29 October 2014

Accepted 9 July 2015

Associate Editor: André Rodrigues

Keywords:

Date palm wastes

Cellulases

Enzymes saccharification

Lactic acid

ABSTRACT

The bioconversion of cellulosic wastes into high-value bio-products by saccharification and fermentation processes is an important step that can reduce the environmental pollution caused by agricultural wastes. In this study, enzymatic saccharification of treated and untreated date palm cellulosic wastes by the cellulases from *Geobacillus stearothermophilus* was optimized. The alkaline pre-treatment of the date palm wastes was found to be effective in increasing the saccharification percentage. The maximum rate of saccharification was found at a substrate concentration of 4% and enzyme concentration of 30 FPU/g of substrate. The optimum pH and temperature for the bioconversions were 5.0 and 50 °C, respectively, after 24 h of incubation, with a yield of 31.56 mg/mL of glucose at a saccharification degree of 71.03%. The saccharification was increased to 94.88% by removal of the hydrolysate after 24 h by using a two-step hydrolysis. Significant lactic acid production (27.8 mg/mL) was obtained by separate saccharification and fermentation after 72 h of incubation. The results indicate that production of fermentable sugar and lactic acid is feasible and may reduce environmental pollution by using date palm wastes as a cheap substrate.

© 2015 Sociedade Brasileira de Microbiologia. Published by Elsevier Editora Ltda. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Introduction

At present, the conversion of low-value agriculture wastes into valuable commodities, energy, chemicals and microbial protein by saccharification and fermentation processes is not economically feasible, largely due to the costs of cellulosic materials and cellulolytic enzymes, as well as technical

problems associated with cellulose saccharification.^{1–5} There is an increased interest in using thermophilic bacteria *Geobacillus stearothermophilus* for the production of cellulases and separate saccharification and fermentation of lignocellulosic biomass due to their higher operating temperatures and broad substrate range.^{6,7} The complete cellulose hydrolysis can be achieved by a combination of three types of cellulases: endoglucanases, which cleave internal glucosidic bonds;

E-mail: salrumman@kku.edu.sa

<http://dx.doi.org/10.1016/j.bjm.2015.11.015>

1517-8382/© 2015 Sociedade Brasileira de Microbiologia. Published by Elsevier Editora Ltda. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

exoglucanases, which cleave cellobiosyl units from the ends of cellulose; and glucosidase, which cleaves glucose units from cello-oligosaccharides. Endoglucanases are characterized by their activity toward substituted cellulose derivatives such as carboxymethylcellulose, while exocellulases have been operationally defined by their ability to degrade microcrystalline cellulose.⁸

Out of the total global production of 7.4 million tons of dates, 5.4 million come from the Arab world.⁹ The Kingdom of Saudi Arabia (KSA) is a major date-producing country and is ranked second in the world. The total area planted with date palm trees is about 162,000 hectares, while the number of palm trees has reached nearly 23 million.¹⁰ Besides fruits, date palm also provides a large number of other products that have a wide range of applications. It can be used as a raw material for certain industrial purposes. Practically all parts of date palm are usable such as trunk, leaves (whole leaves, midribs, leaflets and spines, and the sheath at the leaf base), reproductive organs (spathes, fruit stalks, spikelets and pollens) and many of their extracts.¹¹ Date palm (*Phoenix dactylifera*) has high values of cellulose (45.3%), hemicellulose, (29.13%), and lignin (25.82%).¹² Lignocellulosics cannot be saccharified by cellulases to yield sugar unless they are processed through mechanical, physical, and chemical pre-treatments to remove the inhibitory lignin complex, to reduce the crystallinity and degree of polymerization of cellulose, to increase the surface area available for the enzymes, and to enhance the susceptibility of the substrates to enzymes.^{13–16} Lactic acid is a valuable organic acid due to its broad applications in pharmaceutical, leather, and food industries, and its potential for the production of biodegradable poly-lactic acid—an environmentally friendly alternative to plastic.^{17–19} In this study, an optimized production of glucose syrup by enzymatic saccharification of treated and untreated date palm wastes was investigated. Besides this, an attempt was also made to produce lactic acid by separate saccharification and fermentation.

Materials and methods

Enzyme source

The bacterial species *Geobacillus stearothermophilus* Y-1, as a source of cellulases, was isolated from the Najran region, KSA. Culture from agar plate was inoculated into a 50 mL tube containing 5 mL of nutrient broth and incubated at 50 °C in an orbital shaker at 200 rpm. This culture was used to inoculate a 250 mL Erlenmeyer flask containing 50 mL Bushnell Haas medium (BHM).²⁰ The production medium (BHM) consisted of: MgSO₄·7H₂O (0.2 g/L), K₂HPO₄ (1 g/L), KH₂PO₄ (1 g/L), yeast extract (1.0 g/L), FeCl₃·6H₂O (0.05 g/L), CaCl₂ (0.02 g/L), and Tween 80 (0.2%). It was supplemented with 2.0% alkaline-treated date palm leaves as a carbon source. The optimum conditions for cellulase production, when the fermentation period was extended up to 48 h, were as follows: cultivation temperature 45 °C, pH 7.0, and agitation rate 200 rpm (data not shown). The cells and insoluble materials were removed by centrifugation at 10,000 rpm for 10 min and the cell-free supernatant was used as the enzyme source. The cellulases

system contained: FPase 8.105 U/mL, CMCase, 12.84 U/mL and β-glucosidase 3.74 U/mL.

Pre-treatments of date palm wastes

Date palm cellulosic wastes (leaves, leaf bases, and fibers) were collected from a date palm plantation in Abha city, KSA and used as the cellulosic substrate. The wastes were ground and pre-treated by two methods: (1) Alkaline pre-treatment: 2N NaOH at 30 °C for 48 h²¹ and (2) acid-steam pre-treatment: 1% H₂SO₄, 120 °C for 100 min.²² After the treatment, the wastes were washed thoroughly with tap water until neutralized and oven dried at 70 °C. Dried materials were ground through a Wiley Mill (Model 2 Thomas Co., USA) to obtain a particle size ≤1 mm. Determination of cellulose, hemicellulose and lignin contents in the treated and untreated wastes was performed according to Saura-Calixto et al.²³

Enzymatic saccharification of date palm cellulosic wastes

Enzymatic hydrolysis of date palm cellulosic wastes was carried out following the methods of Holtzaple et al.²⁴ Briefly, 2% cellulosic waste was mixed with an appropriate amount of enzyme (20 FPU/g of substrate) in a 100-mL Erlenmeyer flask containing 20 mL acetate buffer (pH 5.0), and sodium azide (0.3 g/L) was added to inhibit microbial contamination. The enzymatic hydrolysis was carried out for 24 h at 50 °C using a shaking incubator (100 rpm). After the saccharification period, the reaction mixture was centrifuged at 4000 rpm for 30 min to remove unhydrolyzed substrate and the supernatant was subjected to glucose determination. The effects of incubation temperature, pH, substrate concentration, enzyme concentration, and incubation time on saccharification and glucose production were investigated.

Reducing sugars assay

The amount of reducing sugars released by the enzymatic hydrolysis was estimated by dinitrosalicylic acid (DNS) method.²⁵ The sample (1.0 mL) was mixed with 2 mL of DNS reagent. The tubes were then heated in a boiling water bath for 5 min, after cooling at room temperature; the absorbance was measured at 540 nm. The amount of the released reducing sugar was calculated by using a standard curve of glucose, and expressed as mg/mL. The percentage saccharification was calculated using the equation of Mandels and Sternberg²⁶ as follows:

$$\% \text{Saccharification} = \frac{\text{Reducing sugars (mg/mL)} \times 0.9 \times 100\%}{\text{initial substrate concentration (mg/mL)}}$$

The factor 0.90 was used to convert polysaccharide to monosaccharide accounting for water uptake during hydrolysis. All experiments were carried out in triplicates.

Lactic acid fermentation

Strain and growth medium

The culture of *Lactobacillus delbrueckii* subsp. Lactis (B. 01357), a homo fermentative lactic acid producer, was utilized in

this study. The strain was obtained from the National Collection of Agriculture and Industrial Microorganisms, Budapest, Hungary. The medium used for cell growth contained (g/L): peptone 10.0, meat extract 10.0, yeast extract 5.0, D-glucose 20.0, tween-80 1.0, K₂HPO₄ 2.0, sodium acetate 5.0, triammonium citrate 2.0, MgSO₄·7H₂O 0.2, MnSO₄·4H₂O 0.05. The cells from the stock culture were transferred to a sterile growth medium and incubated at 45 °C for 24 h. The obtained culture was used as inoculum for the successive fermentation process.

Lactic acid production by separate saccharification and fermentation

At first, the cellulosic substrate was hydrolyzed under optimum conditions. The hydrolysate (produced after enzymatic saccharification) was supplemented with nutrients (6% yeast extract, 0.167% sodium acetate, 0.167% (NaPO₃)n, 0.1% MgSO₄·7H₂O, 0.005% FeSO₄·7H₂O, 0.005% MnSO₄·H₂O) made to 50 mL (pH 5.0) in a 100-mL flask. CaCO₃ (5%) was added to prevent acidification. The inoculum size of *Lactobacillus delbrueckii* B. 01357 was 10% (v/v) and the fermentation was carried out at 50 °C for 5 days.

The productivity of lactic acid (g/L/h)

$$= \frac{\text{concentration of lactic acid produced (g/L)}}{\text{fermentation time (h)}}$$

The yield of lactic acid from glucose (%) = concentration of lactic acid produced (g/L) × 100% / [initial concentration of glucose in the cellulosic hydrolysate (g/L)] – [final concentration of remaining glucose in the fermentation broth (g/L)].

Lactic acid determination

Lactic acid concentration was determined as described by Taylor,²⁷ using pure lactic acid as standard, and concentration was expressed as mg/mL.

Statistical analysis

The obtained data were subjected to analysis of variance using the MSTATC program. The least significant difference (LSD) at $p \leq 0.05$ was used to detect differences between the treatments.

Results and discussion

Chemical analysis of treated and untreated date palm cellulosic wastes

The amount of carbohydrate polymers and lignin varies among plants, and there are also variations in the constituents in a single plant depending on its age, stage of growth, and other conditions. Cellulose is the dominant structural polysaccharide in plant cell walls, followed by hemicelluloses and lignin.²⁸ The changes in composition of date palm cellulosic wastes were compared before and after the alkaline or acid-steam pre-treatments (Table 1). The maximum

lignin content (24.41%) was recorded for leaf bases, followed by leaves (16.71%), and minimum for fibrous date material (12.78%). Date palm leaves contained the highest value of cellulose (59.11%) followed by the leaf bases (51.5%) and trace amounts in fibrous material. For the hemicelluloses content, leaves and leaf bases contained approximately the same amount (16–18%) and the highest value was recorded for fibrous materials (24.14%). These results do not match with those obtained by Ghosh et al.,²⁹ who reported lignin, cellulose, and hemicellulose contents of date palm leaves as 15.3%, 58%, and 20%, respectively. However, Al-Haidary et al.³⁰ reported the main components of the date palm fiber and petiole as cellulose (44.17%), hemicellulose (21.95%), and lignin (12.75%). Conversely, Barreveld¹¹ reported that the main three components in the fibrous parts of date palm, holocellulose, cellulose, and lignin were 48%, 28%, and 28.1%, for leaflets, while for leaf bases, were 54.5%, 22.5%, and 27%, respectively.

It is clear from the results shown in Table 1 that alkaline pre-treatment was useful for selectively reducing lignin content in all investigated wastes, compared with acid-steam pre-treatment. The alkaline treatments removed about 79.05%, 68.4%, and 63.22% of the lignin in leaves, leaf bases, and fibrous material, respectively. An increase in cellulose content up to 12.67%, 7.7%, and 14.1% in leaves, leaf bases, and fibrous materials, respectively, was observed after alkaline pre-treatment. These results are consistent with those described by Carrasco et al.²² and Mussatto et al.³¹ These authors reported that alkali treatment with NaOH is one of the most common methods to delignify agricultural residues that causes swelling, leading to an increase in the internal surface area, decrease in the degree of polymerization and crystallinity, separation of structural linkages between lignin and carbohydrates, and disruption of the lignin structure. The disadvantage of this technique is that it also degrades some fraction of the hemicellulose. Conversely, acid-steam pre-treatment has little effect in reducing lignin content, while it lowers cellulose content. The main effect was an observed reduction of hemicellulose content to 79–93%. Carvalheiro et al.,³² and Kumar et al.³³ reported that dilute acid under steam is the most widely used method for breakdown of hemicellulose, but the limitations of this method include incomplete disruption of the lignin-carbohydrate matrix and generation of compounds that may be inhibitory to microorganisms.³⁴

Effect of pre-treatments on date palm wastes for saccharification and glucose production

The effectiveness of different pre-treatments to alter cellulose structure and to reduce hemicellulose and lignin content in date palm wastes for subsequent use as substrate for enzymatic saccharification was investigated. The results show that untreated substrates were poorly attacked by the cellulase enzymes compared with the pre-treated ones (Fig. 1). The maximum saccharification degrees for untreated substrates were 8.01%, 6.96%, and 5.08% for leaves, leaf bases, and fibrous materials, respectively. Glucose production reached 1.77 mg/mL, 1.55 mg/mL and 1.14 mg/mL for leaves, leaf bases, and fibrous materials, respectively. The low saccharification percentages may be attributed to the natural cellulosic wastes that possess a high amount of lignin, which makes difficult

Table 1 – Chemical composition of treated and untreated date palm cellulosic wastes.

Date palm wastes	Treatments	%		
		Cellulose	Lignin	Hemicellulose
Leaves	Untreated	59.11	16.71	16.43
	Alkaline-treated	66.6	03.5	12.8
	Acid-steam treated	57.7	14.2	03.5
Leaf bases	Untreated	51.5	24.41	18.5
	Alkaline-treated	55.5	07.7	14.6
	Acid-steam treated	48.7	27.5	02.8
Fibrous materials	Untreated	43.21	12.78	24.14
	Alkaline-treated	49.3	04.7	20.5
	Acid-steam treated	38.3	08.6	01.7

[LSD ($p \leq 0.05$): cellulose 0.144652, lignin 0.076727, hemicellulose 0.058289].

for the large protein molecules of enzymes to penetrate into the tight network constituting the plant cell wall. Therefore, pre-treatment of the lignocellulosic substrates is essential for efficient enzymatic hydrolysis.^{35,36}

The optimum amount of sugar was obtained with alkaline-treated substrates. The maximum saccharification rate (41.40%) and glucose production (9.2 mg/mL) were obtained for alkaline-treated leaves (ATL). Alkaline treatment may increase the available surface area and reduce the cellulose crystallinity in leaves compared with leaf bases. These results concord with those of Uzunlu et al.,³⁷ who found that alkaline pre-treatment of poppy stalks resulted in an increased saccharification degree. Moreover, Akhtar et al.³⁵ reported that pre-treatment of wheat straw, rice straw, and bagasse with 2% NaOH was most effective for increasing the enzymatic saccharification by *Bacillus subtilis* cellulases, with saccharification rates of 33.0%, 25.5%, and 35.5%, respectively. On the other hand, acid-steam substrates appeared to be the next alternative. The maximum saccharification degree (19.57%) and glucose production (4.37 mg/mL) were observed with date

palm leaves, followed by leaf bases, 15.66% and 3.47 mg/mL, respectively. These results are in contrast with those obtained by Saha et al.,³⁸ who reported that the conversion degree for enzymatic hydrolysis of cellulosic wastes pre-treated by diluted H_2SO_4 at an elevated temperature was not less than 80%. These results indicate that the main factor affecting enzymatic saccharification was the nature of the alkaline pre-treatment, which can dissolve part of the hemicelluloses and lignin and lead to swelling of the cellulose. Therefore, alkaline treated date palm leaves were chosen as the best substrate for the subsequent saccharification experiments.

Effect of substrate concentration on saccharification and glucose production

The results illustrated in Fig. 2 indicate that as the concentration of alkaline-treated date palm leaves (ATDPL) was increased, the sugar production and saccharification percentages were increased up to 4% for ATDPL. Similar results were reported by Singh et al.,³⁹ who obtained the maximum glucose

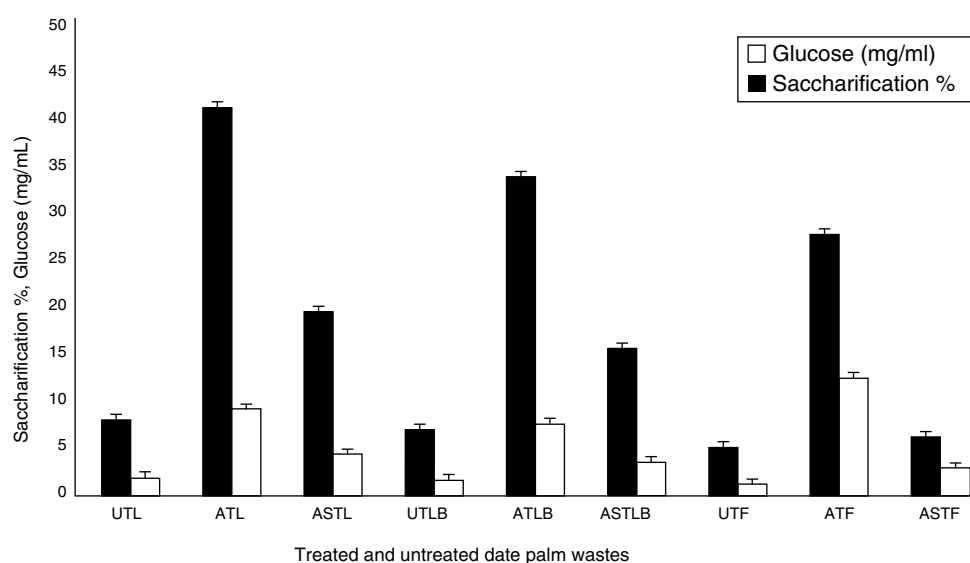


Fig. 1 – Effect of pre-treatments on saccharification and glucose production by date palm wastes (UTL, untreated leaves; ATL, alkaline-treated leaves; ASTL, acid-steam-treated leaves; UTLB, untreated leaf bases; ATLB, alkaline-treated leaf bases; ASTLB, acid-steam-treated leaf bases; UTF, untreated fibrous; ATF, alkaline-treated fibrous; ASTF, acid-steam-treated fibrous) [LSD ($p \leq 0.05$): saccharification 0.035754, glucose 0.027816].

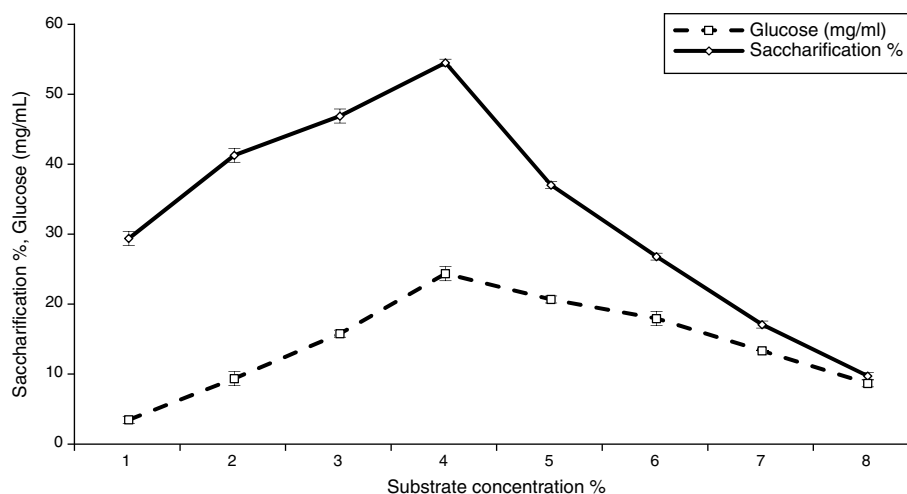


Fig. 2 – Effect of substrate concentration on saccharification and glucose production [LSD ($p \leq 0.05$): saccharification 0.025365, glucose 0.024607].

production with 4% alkaline-treated bagasse. Furthermore, Akhtar et al.³⁵ reported the optimum substrate concentration for maximum enzymatic saccharification of alkaline pre-treated wheat straw, rice straw, and bagasse as 4%, while using *Bacillus subtilis* cellulases. The increase in substrate concentration decreased the saccharification percentage, which might be caused by poor stirring, enzyme inhibition by saccharification products, and decreased synergistic action between cellulases enzymes, as mentioned by Krishna and Chowdary⁴⁰ and Wen et al.⁴¹ However, Mahamud and Gomes³⁶ reported maximum hydrolysis of alkaline-treated sugarcane bagasse at a 2.5% substrate concentration. Furthermore, Zhang et al.⁴² reported that the feasible substrate concentration for saccharification of steam explosion pre-treated corn stover was about 3% and an increase in substrate concentration from 4 to 6% limited the rate of hydrolysis. Moreover, Ouyang et al.⁴³ obtained maximum saccharification yield (90%) when used 3% corncob residue concentration.

Effect of enzyme concentration on saccharification and glucose production

The effects of enzyme concentration on the saccharification percentage and sugar production was investigated and found to be in a range of 10–80 FPU/g substrate (Fig. 3). The results revealed that the saccharification degree depended strongly on the enzyme-substrate ratio. The maximum saccharification degree and sugar production were gradually increased up to 71.03% and 31.57 mg/mL, respectively, at 30 FPU/g substrate. A further increase in the enzyme load did not improve sugar yield. High cellulase concentrations may counteract the saccharification by increasing the rate of transglycosylation reactions⁴⁴ along with hydrodynamic instability, improper mixing, and suspension of slurry.³⁵ As the cost of cellulase contributes significantly to the cost of the hydrolysis process, the enzyme dosage should be minimized as much as possible.⁴⁵ Furthermore, Krishna and Chowdary⁴⁰ found a

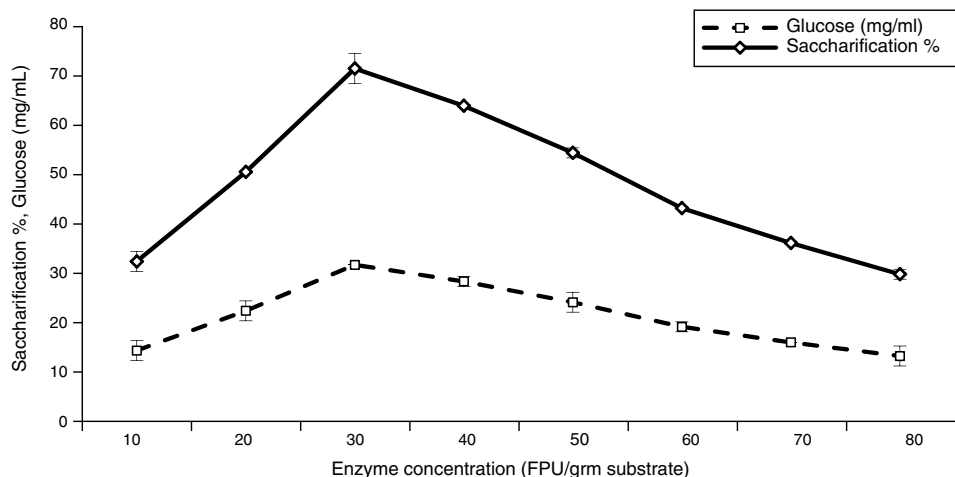


Fig. 3 – Effect of enzyme substrate ratio on saccharification and glucose production [LSD ($p \leq 0.05$): saccharification 0.023826, glucose 0.0261].

cellulase concentration of 120 FPU/g substrate as optimal for enzymatic saccharification; and an increase in enzyme content from 40 to 120 FPU increased the yield only by 10%. Conversely, Zhang et al.^{42,46} reported that the optimum enzyme concentrations for saccharification of ammonia pre-treated corncob and steam explosion pre-treated corn stover were 50 and 20 FPU/g substrate, respectively. In contrast, Ouyang et al.⁴³ suggested that the enzyme dosage for saccharification should not to exceed 5–8 FPU/g substrate. They obtained maximum saccharification yield (90%) when the enzyme concentration was 8 FPU/g substrate of corncob residue.

Effect of pH value on saccharification and glucose production

The results illustrated in Fig. 4 indicate that the sugar and saccharification percentages were increased significantly at pH 5.0. These results are consistent with few earlier reports such as Singh et al.³⁹ and Krishna and Chowdary.⁴⁰ They found that pH has a significant effect on the hydrolytic behavior of cellulases; the hydrolytic reaction is possible only after enzyme–substrate complex formation, and the effect of pH on the both adsorption and hydrolysis is similar that usually occur at around pH 4.8. Moreover, Mahamud and Gomes³⁶ reported maximum hydrolysis of alkali-treated sugarcane bagasse at pH 5.0. Furthermore, Baig et al.¹³ reported that pH 6.0 was optimal for enzymatic saccharification of steam-treated leaves and pseudo-stem of banana. Conversely, Karmakar and Ray⁴⁷ reported pH 7.0 as optimal for saccharification of various agro-wastes, such as orange peel, sugarcane bagasse, dried flower, water hyacinth, and coconut shell, while using cellulase enzymes from *Rhizopus oryzae* PR 7. They also observed that the optimal pH was higher than the acidic pH optima of CMCase from *Trichoderma viride*. However, similar to that reported from *Bacillus subtilis*.³⁵

Effect of temperature on saccharification and glucose production

In order to evaluate the optimal temperature for enzymatic saccharification of ATDPL, the hydrolysis was performed at 40–70 °C (Fig. 5). The results indicate that the maximum

enzymatic hydrolysis occurred at 50 °C, corresponding to a degree of saccharification of 71.23%. However, a minor decrease in saccharification to 66.48% was observed at 55 °C. These results are consistent with those of Krishna and Chowdary,⁴⁰ Akhtar et al.,³⁵ Taniguchi et al.,⁴⁸ Mahamud and Gomes,³⁶ and Sharma et al.⁵ They observed that maximum adsorption of enzymes and the saccharification rate were achieved at the same temperature (50 °C) and the active enzyme was bound more strongly than the non-active enzyme to cellulose. The results also indicated that increasing the hydrolysis temperature to 70 °C decreased the saccharification percentage to 27.31%. This behavior was probably caused by an increase in enzyme deactivation at higher temperatures. Baig et al.¹³ reported 45 °C as an optimal temperature for enzymatic saccharification of steam-treated leaves and pseudo-stem of banana, while Zhang et al.⁴² found 40 °C as optimal temperature for saccharification of steam explosion pre-treated corn stover.

Effect of reaction time on saccharification and glucose production

The optimum reaction period for sugar production and the saccharification percentage of ATDPL was determined by carrying out the hydrolysis in a shaker at 50 °C for various time intervals (up to 72 h) using 4% substrate and 30 FPU/g substrate in acetate buffer (pH 5). The sugar production and enzymatic hydrolysis in relation to the reaction time varied and showed the maximum value after 24 h (Fig. 6). Extending the reaction time to 36 h had no effect on saccharification. The same trend was also observed by Krishna and Chowdary⁴⁰ and Baig et al.¹³ They reported that the optimum incubation period was 24 h and extending the reaction time did not show any significant effect on enzymatic saccharification of alkaline pre-treated *Antigonun leptopus* leaves and pseudo-stems of banana. In contrast, the maximum saccharification yields (90% and 88.4%, respectively) were obtained at a 48-hour reaction time for saccharification of corncob residue and steam explosion pre-treated corn stover.^{42,43} Additionally, maximum enzymatic saccharification of alkaline pre-treated wheat straw, rice straw, and bagasse occurred after 20 h in the

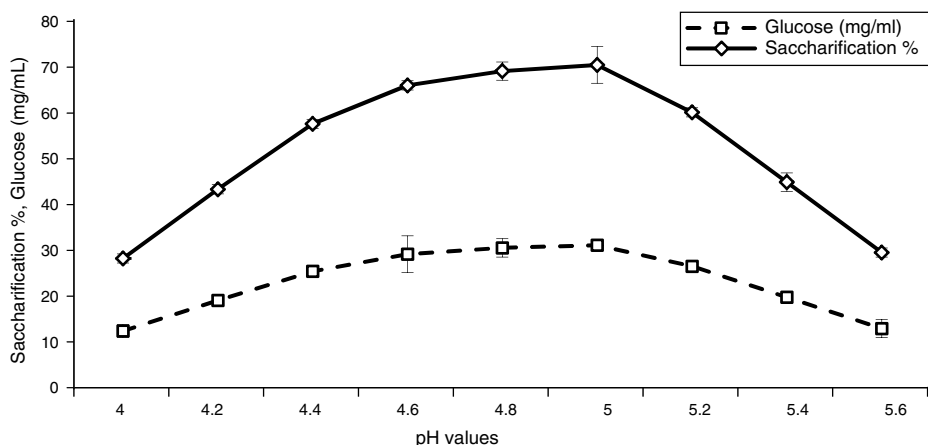


Fig. 4 – Effect of pH value on saccharification and glucose production [LSD ($p \leq 0.05$): saccharification 0.031768, glucose 0.050895].

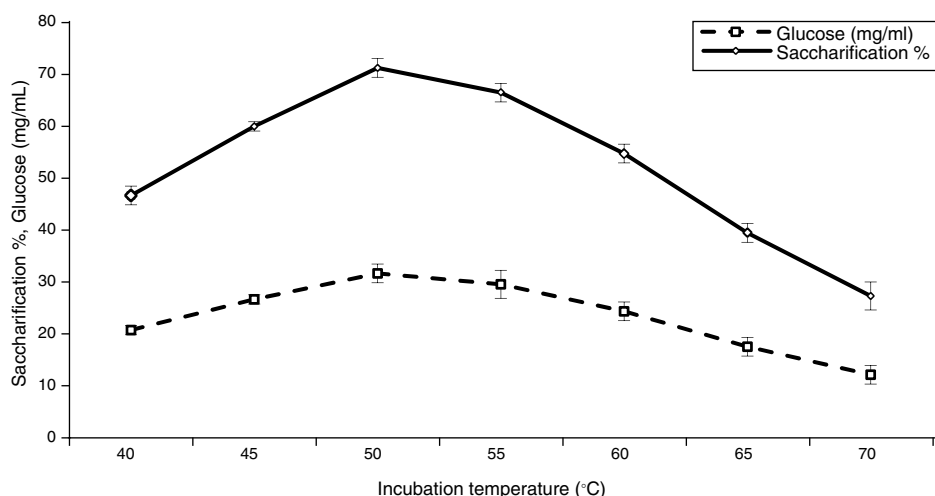


Fig. 5 – Effect of temperature on saccharification and glucose production [LSD ($p \leq 0.05$): saccharification 0.036021, glucose 0.034173].

presence of *Bacillus subtilis* cellulases.³⁵ In another study, the saccharification percentage increased in a uniform manner up to 24 h, but the saccharification per unit of time decreased.⁴⁹ This phenomenon might occur by cellulose recrystallization caused at pH and temperature conditions used for hydrolysis and selective enzyme attack on the amorphous regions of cellulose; both of these processes might occur simultaneously during enzymatic hydrolysis. Furthermore, Mahmud and Gomes³⁶ reported that the rate and extent of saccharification depend on pre-treatment of the substrate, enzyme and substrate concentration, product inhibition, and enzyme stability, all of these make the rate of hydrolysis to decrease rapidly with the time.

Two-step enzymatic saccharification process of ATDPL

It is essential to reuse the enzymes absorbed on the residuals in subsequent saccharification cycles to achieve an

economically viable process. The enzyme molecules bound to the residuals were recovered after the first step of hydrolysis following the methods of Vallander and Eriksson⁵⁰ and Ouyang et al.⁴³ The earlier reports indicate that 71.03% saccharification was obtained in a reference experiment (step 1), where the hydrolysis was continued only for 24 h without interruption. As illustrated in Fig. 7, the saccharification was increased significantly to 94.88% by removing the hydrolysate of 24-hour hydrolysis and then suspending the residual in a fresh buffer to continue the hydrolysis for another 24 h (step 2). This means that a multi-step alternative hydrolysis was better than the continuous hydrolysis for 48 h; and the second batch of hydrolysis resulted in a total saccharification (step 2) of about 23.85%. The high saccharification rate obtained from the two-step process compared with the continuous saccharification for 48 h may be explained on the basis of avoidance of the feedback inhibition of the enzymes by removing the oligosaccharides that accumulate in the first

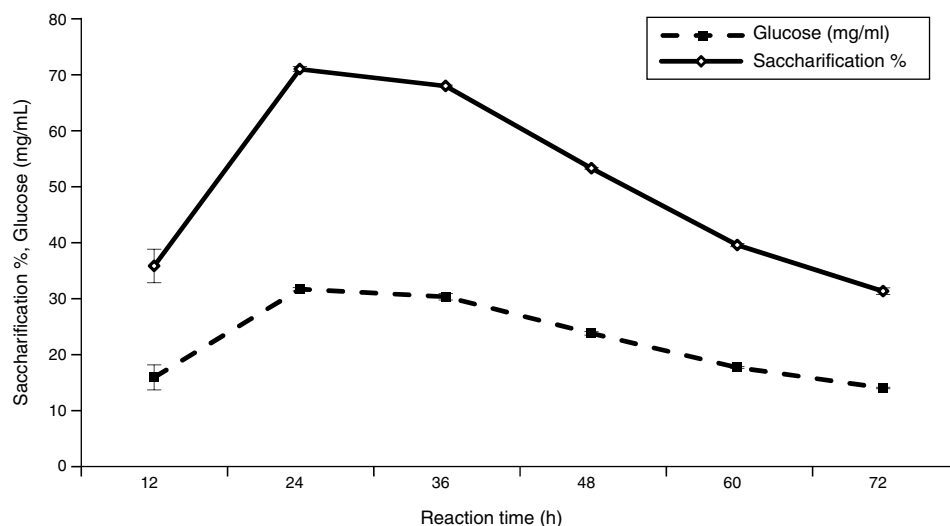


Fig. 6 – Effect of reaction time on saccharification and glucose production [LSD ($p \leq 0.05$): saccharification 0.147473, glucose 0.112541].

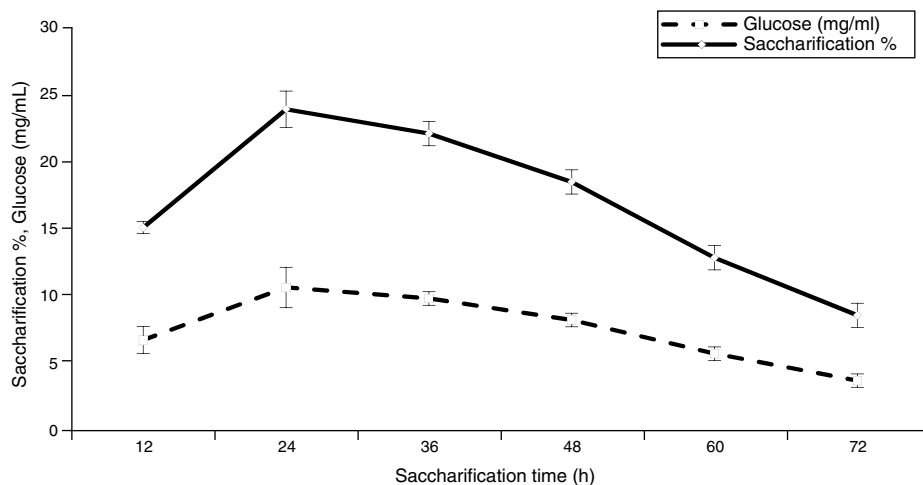


Fig. 7 – Enzymatic saccharification in the second hydrolysis process (two-step) [LSD ($p \leq 0.05$): saccharification 0.036221, glucose 0.058577].

step process.^{43,51,52} Furthermore, Yang et al.⁵³ investigated the feasibility of three-step hydrolysis of steam-exploded corn stover at high-substrate concentrations. They reported that, compared with the one-step hydrolysis for 72 h, an increase in hydrolysis yield of 34–37% could be achieved. They also observed that the removal of end products improved the adsorption of cellulase on the substrate and enhanced the productivity during the enzymatic hydrolysis.

Lactic acid production by separate saccharification and fermentation technique

As mentioned above, alkaline date palm leaves hydrolysate contained a high concentration of glucose (42.16 mg/mL); therefore, this hydrolysate offers a great opportunity as feedstock for lactic acid production. *Lactobacillus delbrueckii* was cultivated at pH 5 and 50 °C on the hydrolysate of alkaline date palm leaves as a substrate and then it was supplemented with other nutrients. The remaining glucose and lactic acid production throughout 96 h of the incubation are illustrated

in Fig. 8. Lactic acid production was obtained (27.8 mg/mL) after 72 h of incubation. The yield of lactic acid from glucose was 76.45% with 0.386 g/L/h productivity rate. The remaining glucose was decreased when the increasing lactic acid production reached 5.8 mg/mL after 3 days of incubation. This yield was higher compared to that reported by Parajo et al.⁵⁴ They reported that 25.29 mg/mL lactic acid was produced using processed wood hydrolysate; however, this yield was lower compared with the results reported by Shen and Xia.⁵⁵ They reported a yield of 65 mg/mL of lactic acid produced from municipal waste hydrolysate and 48.7 g/L lactic acid from corn cob residue hydrolysate. Furthermore, Akao et al.¹⁷ and Zhou et al.¹⁹ observed increased lactic acid production when used separate saccharification and fermentation techniques. On the other hand, Shen and Xia⁵⁵ reported that the accumulation of cellobiose and glucose in separate saccharification and fermentation processes would cause severe feedback inhibition of the cellulase reaction. Thus, the concentration of sugar in the hydrolysate was limited, and the yield of lactic acid was accordingly restricted.

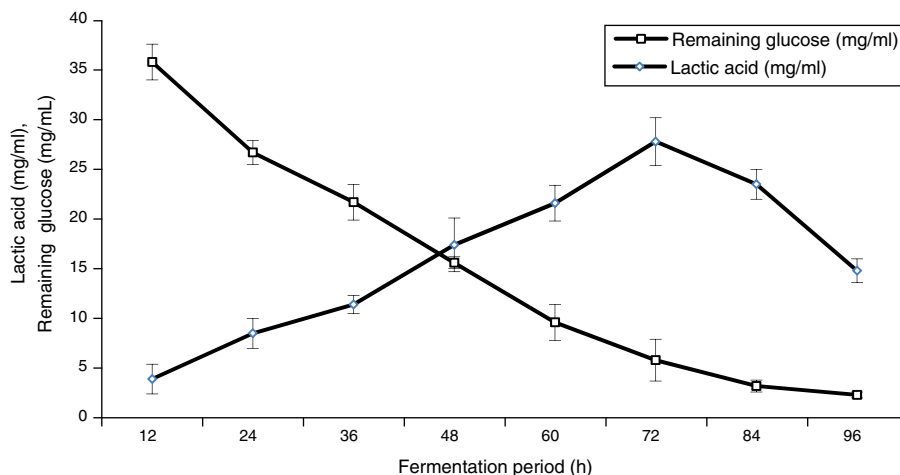


Fig. 8 – Lactic acid production by separate saccharification and fermentation technique [LSD ($p \leq 0.05$): lactic acid 2.062469, remaining glucose 1.659854].

Conclusions

The results revealed that alkaline pre-treatment was the most effective digestion method to decrease the lignin content in all of the investigated wastes. The maximum sugar production and enzymatic saccharification levels were obtained using alkaline-treated date palm leaves using a multi-step hydrolysis by removing the hydrolysate after 24 h. This study demonstrates that date palm wastes can be almost completely converted into fermentable sugar that can ultimately be converted into lactic acid by employing alkaline pre-treatment and separate saccharification and fermentation.

Conflict of interest

The author declares no conflicts of interest.

Acknowledgments

The author would like to acknowledge and thank the King Khalid University for supporting this study.

REFERENCES

- Chandel AK, Chandrasekhar G, Silva MB, Silvério da Silva S. The realm of cellulases in biorefinery development. *Crit Rev Biotechnol*. 2012;32:187–202.
- Rahna K, Rathnan DJ, Balasaravanan T. Isolation screening, identification and optimized production of extracellular cellulase from *Bacillus subtilis* using cellulosic waste as carbon source. *J Microbiol Biotechnol Food Sci*. 2013;2:2383–2386.
- Sadik MW, Al Ashhab AO, Zahran MK, Alsaqan FM. Composting mulch of date palm trees through microbial activator in Saudi Arabia. *Int J Biochem Biotechnol*. 2012;1:156–161.
- Saravanakumar K, Kathiresan K. Bioconversion of lignocellulosic waste to bioethanol by *Trichoderma* and yeast fermentation. *3 Biotech*. 2014;4:493–499.
- Sharma V, Vij H, Singh PK, Bhatt S. Potential cellulase production, optimization and saccharification study by novel thermophilic microbes. *ABS J Sustain Biotechnol*. 2013;1:20–27.
- Makky EA. Avicelase production by a thermophilic *Geobacillus stearothermophilus* isolated from soil using sugarcane bagasse. *World Acad Sci Eng Technol*. 2009;3:9–24.
- Scully M, Orlygsson J. Recent advances in second generation ethanol production by thermophilic bacteria. *Energies*. 2015;8:1–30.
- Behera BC, Parida S, Dutta SK, Thatoi HN. Isolation and identification of cellulose degrading bacteria from mangrove soil of Mahanadi river delta and their cellulase production ability. *Afr J Microbiol Res*. 2014;2:41–46.
- FAO, Food and Agriculture Organization of the United Nations. *Food and Agriculture Organization Statistical Databases (FAOSTAT)*; 2013. Available at: <http://faostat3.fao.org/home/index.html> [01.02.13].
- El-Habba MS, Al-Mulhim F. The competitiveness of the Saudi Arabian date palm: an analytical study. *Afr J Agric*. 2013;8:5260–5267.
- Barreveld WH. Date palm products. Chapter 3, Derived date fruit products. *FAO Agric Serv Bull*. 1993:101.
- Al-Mefarrej HA, Abdel-Aal MA, Nasser RA. Chemical evaluation of some lignocellulosic residues for pulp and paper production. *American-Eurasian J Agric Environ Sci*. 2013;13:498–504.
- Baig MMV, Baia MLB, Baig MIA, Yasmeen M. Saccharification of banana agro-waste by cellulolytic enzymes. *Afr J Biotechnol*. 2004;3:447–450.
- Jahromi MF, Liang JB, Rosfarizan M, Goh YM, Shokryazdan P, Ho YW. Effects of *Aspergillus niger* (K8) on nutritive value of rice straw. *Afr J Biotechnol*. 2010;9:7043–7047.
- Ayyachamy M, Gupta VK, Cliffe FE, Tuohy MG. Enzymatic saccharification of lignocellulosic biomass. *Fungal Biol*. 2013;475–481.
- Zhong C, Wang C, Wang F, Jia H, Wei P, Zhao Y. Enhanced saccharification of lignocellulosic biomass by pretreatment with quaternary ammonium hydroxide. *Chem Technol Biotechnol*. 2014. <http://dx.doi.org/10.1002/jctb.4530>. <http://wileyonlinelibrary.com>.
- Akao S, Maeda K, Nakatani S, et al. Comparison of simultaneous and separate processes: saccharification and thermophilic L-lactate fermentation of catch crop and aquatic plant biomass. *Environ Technol*. 2012;33:1523–1529.
- Wang Q, Zou D, Ma H, Ji Y, Wang X. Simultaneous saccharification and fermentation of corn straw to lactic acid. *Chem Biochem Eng Q*. 2010;24:371–376.
- Zhou J, Ouyang J, Zhang M, Yu H. Simultaneous saccharification and fermentation of bagasse sulfite pulp to lactic acid by *Bacillus coagulans* CC17. *BioResources*. 2014;9:2609–2620.
- Bushnell LD, Haas HF. The utilization of certain hydrocarbons by microorganisms. *J Bacteriol*. 1941;41:653–673.
- Deshpande MV. Ethanol production from cellulose by coupled saccharification/fermentation using *Saccharomyces cerevisiae* and cellulase complex from *Sclerotium rolfsii* UV-8 mutant. *Appl Biochem Biotechnol*. 1992;36:227–234.
- Carrasco JE, Saiz M, Navarro A, Soriano P, Saez F, Martinez JM. Effect of dilute acid and steam explosion pretreatments on the cellulose structure and kinetics of cellulosic fraction hydrolysis by dilute acids in lignocellulosic materials. *Appl Biochem Biotechnol*. 1994;45(46):23–34.
- Saura-Calixto F, Canellas J, Garcia-Raso J. Determination of hemicellulose, cellulose and lignin contents of dietary fibre and crude fibre of several seed hulls. *Data comparison. Z Lebensm Unters Forsch*. 1983;177:200–202.
- Holtzapfel MT, Ripley EP, Nikolaou M. Saccharification, fermentation, and protein recovery from low-temperature AFEX-treated coastal bermudagrass. *Biotechnol Bioeng*. 1994;44:1122–1131.
- Miller GL. Use of dinitrosalicylic acid reagent for determination of reducing sugar. *Anal Chem*. 1959;31:426–428.
- Mandels M, Sternberg D. Recent advances in cellulase technology. *J Ferment Technol*. 1976;54:267–286.
- Taylor KA. A simple colorimetric assay for muramic acid and lactic acid. *Appl Biochem Biotechnol*. 1996;56:49–58.
- Saha BC. Hemicellulose bioconversion. *J Ind Microbiol Biotechnol*. 2003;30:279–291.
- Ghosh SK, Sengupta S, Naskar M. Physio-mechanical properties of particle boards from agro-wastes. *J Sci Ind Res (India)*. 2010;69:396–400.
- Haidary AA, Zanganah FH, Al-Azawi SRF, Khalili FI, Al-Dujaili AH. A study on using date palm fibers and leaf base of palm as adsorbents for Pb (II) ions from its aqueous solution. *Water Air Soil Pollut*. 2011;214:73–82.
- Mussatto SI, Fernandes M, Roberto IC. Lignin recovery from brewer's spent grain black liquor. *Carbohydr Polym*. 2007;70:218–223.
- Carvalho F, Duarte LC, Girio FM. Hemicellulose biorefineries: a review on biomass pretreatments. *J Sci Ind Res (India)*. 2008;67:849–864.

33. Kumar P, Barrett DM, Delwiche MJ, Stroeve P. Methods for pretreatment of lignocellulosic biomass for efficient hydrolysis and biofuel production. *Ind Eng Chem Res.* 2009;48:3713–3729.
34. Sun Y, Cheng J. Hydrolysis of lignocellulosic materials for ethanol production: a review. *Bioresour Technol.* 2002;83:1–11.
35. Akhtar MS, Saleem M, Akhtar MW. Saccharification of lignocellulosic materials by the cellulases of *Bacillus subtilis*. *Int J Agric Biol.* 2001;3:199–202.
36. Mahamud MR, Gomes DJ. Enzymatic saccharification of sugar cane bagasse by the crude enzyme from indigenous fungi. *J Sci Res.* 2012;4:227–238.
37. Uzunlu N, Hoşgün EZ, Bozan B. Optimization of alkaline pretreatment for enzymatic saccharification of poppy stalks. *BioResources.* 2014;9:2824–2834.
38. Saha BC, Iten LB, Cotta MA, Wu YV. Dilute acid pretreatment, enzymatic saccharification, and fermentation of rice hulls to ethanol. *Biotechnol Prog.* 2005;21:816–822.
39. Singh A, Abidi AB, Darmwal NS, Agrawal AK. Saccharification of cellulosic substrates by *Aspergillus niger* cellulase. *World J Microbiol Biotechnol.* 1990;6:333–336.
40. Hari Krishna S, Chowdary GV. Optimization of simultaneous saccharification and fermentation for the production of ethanol from lignocellulosic biomass. *J Agric Food Chem.* 2000;48:1971–1976.
41. Wen Z, Liao W, Chen S. Hydrolysis of animal manure lignocellulosics for reducing sugar production. *Bioresour Technol.* 2004;91:31–39.
42. Zhang Y, Lu C, Tang J, et al. Enhanced saccharification of steam explosion pretreated corn stover by the supplementation of thermoacidophilic β -glucosidase from a newly isolated strain, *Tolyposcladium cylindrosporium* syzx4. *Afr J Microbiol Res.* 2011;5:2413–2421.
43. Ouyang J, Li Z, Li X, Ying H, Yong Q. Enhanced enzymatic conversion and glucose production via two-step enzymatic hydrolysis of corncob residue from xylo-oligosaccharides producer's waste. *Biol Res.* 2009;4:1586–1599.
44. Micard V, Renard CM, Colquhoun IJ, Thibault JF. End-products of enzymic saccharification of beet pulp, with a special attention to feruloylated oligosaccharides. *Carbohydr Polym.* 1997;32:283–292.
45. Chen M, Xia LM, Xue PJ. Enzymatic hydrolysis of corncob and ethanol production from cellulosic hydrolysate. *Int Biodeterior Biodegrad.* 2007;59:85–89.
46. Zhang M, Su R, Qi W, He Z. Enhanced enzymatic hydrolysis of lignocellulose by optimizing enzyme complexes. *Appl Biochem Biotechnol.* 2010;160:1407–1414.
47. Karmakar M, Ray R. Current trends in research and application of microbial cellulases. *Res J Microbiol.* 2011;6:41–53.
48. Taniguchi M, Hoshina M, Tanabe S, et al. Production of L-lactic acid by simultaneous saccharification and fermentation using unsterilized defatted rice bran as a carbon source and nutrient components. *Food Sci Technol Res.* 2005;11:400–406.
49. Kim DW, Yang JH, Jeong YK. Adsorption of cellulase from *Trichoderma viride* on microcrystalline cellulose. *Appl Microb Biotechnol.* 1988;28:148–154.
50. Vallander L, Eriksson KE. Enzymatic recirculation in saccharification of lignocellulosic materials. *Enzyme Microbiol Technol.* 1987;9:714–720.
51. Vallander L, Eriksson KE. Enzymic hydrolysis of lignocellulosic materials: I. Models for the hydrolysis process – a theoretical study. *Biotechnol Bioeng.* 1991;38:135–138.
52. Qi B, Chen X, Su Y, Wan Y. Enzyme adsorption and recycling during hydrolysis of wheat straw lignocellulose. *Bioresour Technol.* 2011;102:2881–2889.
53. Yang J, Zhang X, Yong Q, Yu S. Three-stage enzymatic hydrolysis of steam-exploded corn stover at high substrate concentration. *Bioresour Technol.* 2011;102:4905–4908.
54. Parajo JC, Alonso JL, Moldes AB. Production of lactic acid from lignocellulose in a single stage of hydrolysis and fermentation. *Food Biotechnol.* 1997;11:45–58.
55. Shen X, Xia L. Lactic acid production from cellulosic waste by immobilized cells of *Lactobacillus delbrueckii*. *World J Microbiol Biotechnol.* 2006;22:1109–1114.